



Q2 Max ワイヤレス メカニカルキーボード

Knob
Version

組み立て済みバージョン

キーボード

1x 完全に組み立てられたキーボード

内容物

1x アルミニウムケース

1x PCB

1x PCプレート

1x 吸音材

1x IXPEフォーム

1x PETフィルム

1x ラテックスボトムパッド

1x ボトムケースアコースティックフォーム


1x ボトムケース PET フィルム

14x ガスケット

4セットx スタビライザー

1セットx キーキャップ (ダブルショットPBT)

1セットx スイッチ

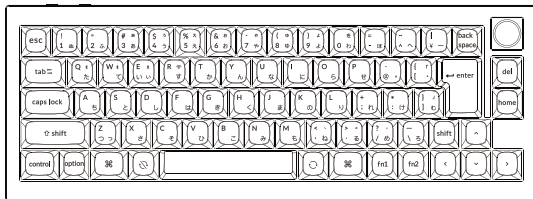

ケーブル

1x Type-Cケーブル

1x Type-A to Type-Cアダプター

1x レシーバー用延長アダプター

レシーバー


1x Type-A 2.4GHzレシーバー

工具

1x キーキャップ & スイッチプラー

1x ネジ回し

1x 六角レンチ

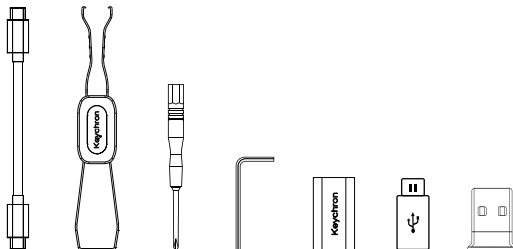

ベアボーン・バージョン

キーボードキット

1x キーボードキット

(キーキャップ、スイッチなし)

内容物

1x アルミニウムケース

1x PCB

1x PCプレート

1x IXPEフォーム

1x PETフィルム


1x ラテックスボトムパッド

1x ボトムケースアコースティックフォーム

1x ボトムケース PET フィルム

14x ガスケット

4セットx スタビライザー

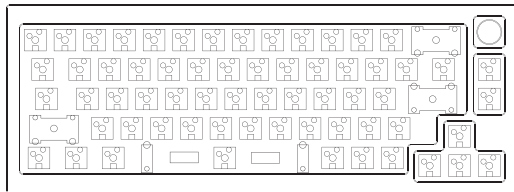

ケーブル

1x Type-Cケーブル

1x Type-A to Type-Cアダプター

1x レシーバー用延長アダプター

レシーバー


1 x Type-A 2.4GHzレシーバー

工具

1x キーキャップ & スイッチプラー

1x ネジ回し


1x 六角レンチ

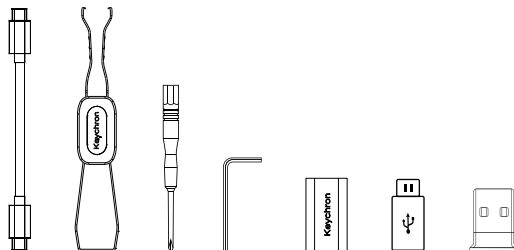

クイックスタートガイド


Windows をお使いの方は、付属のWindows 用キーキャップと交換してお使いください。

Mac / Windows

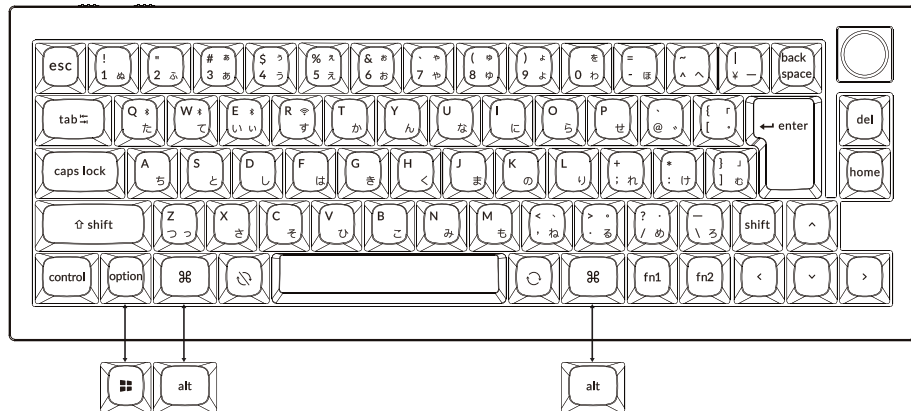

1 適切なシステムに切り替える

左上のシステムとグルが、お使いのコンピュータのOSと同じシステムに切り替わっていることを確認してください。




2 2.4GHzレシーバー接続



2.4GHzレシーバーを接続するデバイスのUSBポートに接続してください。



モード切替スイッチを2.4GHzに切り替えてください。




G = 2.4 GHz




注: より良いワイヤレス体験のために、もしも2.4GHzレシーバーとQ2 Maxとの距離がある場合はType-CケーブルとType-A to Type-Cアダプターを使用して2.4GHzレシーバーを接続して、テーブルのQ2 Maxキーボードの近くに置くと、遅延率が低くかつ信号干渉が少なくなります。


3 Bluetooth接続




ボタンをBluetoothに切り替えてください。




fn1キー + Qを4秒間押してKeychron Q2 Max
をデバイスとペアリングしてください。



4 ケーブル接続




スイッチをケーブルに切り替えて下さい。



5 マルチメディアキーとファンクションキー

マルチメディアキー



ファンクションキー

F1 / F2 / F3 / F4 / F5 / F6 / F7 / F8 / F9 / F10 / F11 / F12

マルチメディアキーを有効にするには、「Fn1」キーと下記イラストのキーを同時に押下します。




ファンクションキーを有効にするには、「Fn2」キーと下記イラストのキーを同時に押下します。




6 バックライト

fn1 + A を押してバックライトの効果を変更します




fn1 + caps lock を押してバックライトのon/offを変更します




7 バックライトの明るさを調整

fn1 + S を押してバックライトを明るくします



fn1 + S


fn1 + X を押してバックライトを暗くします



fn1 + X

8 バックライトの速度を調整します

fn1 + G を押してバックライトのスピードを速くします



fn1 + G

fn1 + B を押してバックライトのスピードを遅くします



fn1 + B


9 保証について

本キーボードはカスタマイズ性が高く、リビルドも容易です。
保証期間中にキーボードの部品に不具合が生じた場合、
キーボード全体ではなく、不具合のある部品のみを交換する
ご対応となります。



10 レイヤー

このキーボードのキー設定には5つのレイヤーがあります。
レイヤー0はMac用です。
レイヤー1はWindows用です。
レイヤー2はMacのマルチメディアキー用です。
レイヤー3はWindowsのマルチメディアキー用です。
レイヤー4はファンクションキー用です。



システムトグルがMacに切り替わっていれば、レイヤー0が有効になります。



システムトグルがWinに切り替わっていれば、レイヤー1が有効になります。



11 Keychron Launcherアプリ

Keychronオンラインランチャーアプリをご使用の際は、launcher.keychron.comにアクセスしてください。

このアプリはキーのリマップ、キーの作動ポイントの調整、複数のコマンドを1つのキーに割り当てたり、ゲームコントローラーモードに入る設定があります(ご使用可能な設定はキーボードの種類により異なります)。


Keychron Launcherアプリが接続したキーボードを認識しない場合は、弊社サポートまでご連絡ください。サポートまでご連絡ください。



*オンラインKeychron Launcherアプリは最新バージョンのChrome、Edge、Operaブラウザでのみ動作します。

*オンラインKeychron Launcherアプリは、キーボードがコンピューターに有線で接続されている時のみ動作します。

12 ファクトリリセット



fn2 + J + Z

トラブルシューティングについて、キーボードの調子が悪い場合は以下ご確認ください。

【ファクトリリセット】

1. キーボードの電源をONにします。
2. fn2 + J + Zを同時に約4秒間長押しします。キーボードのバックライトが赤く約3秒間点滅したら、ファクトリリセットが実行されたことを示します。

【キーボードのファームウェアをフラッシュする】

1. launcher.keychron.comにアクセスし、オンラインKeychron Launcherアプリを開きます。
2. キーボードがケーブルまたは有線モードになっていることを確認し、電源ケーブルを差し込みます。
3. Keychron Launcherの左側にある「Firmware Update」タブを確認してキーボードを接続します。
4. Keychron Launcherより表示される案内に沿ってファームウェアのアップデートを完了します。

*詳細な手順は、keychron.comでキーワード「ファームウェア」を検索してください。

Q2 Max ワイヤレス メカニカルキーボード仕様

トータルキー数: 67キー(US)、71キー(日本語)

スイッチ: メカニカル

バッテリー: 4000mAh

ワイヤレス作動時間(RGB): 最大100時間(最小輝度)

充電時間: 約 5 時間

充電ポート: Type-C

モード: 2.4GHz / ケーブル / Bluetooth



ワイヤレス有効距離: 最大10メートル(オープンスペース)

Bluetooth デバイス名: Keychron Q2 Max

動作環境: -10 ~ 50℃

製品の仕様は予告なく変更になる場合があります。予めご了承ください。


Q2 Max ワイヤレス メカニカルキーボード概要

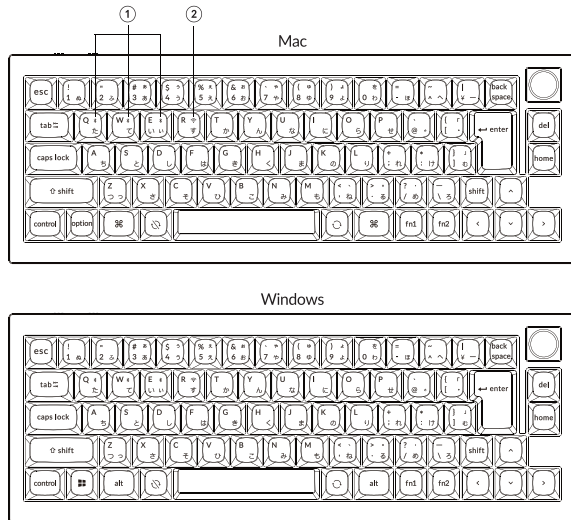


- ① Bluetoothインジケータ
- ② 2.4Gインジケータ
- ③ G / Cable / BT (モード切替スイッチ)
- ④ Win/Android Mac/iOS(OS切替スイッチ)
- ⑤ Type-C ポート
- ⑥ 充電インジケータ

デフォルト・キーレイアウト:

レイヤー0: キーボードのシステムトグルがMacの場合に有効になります。

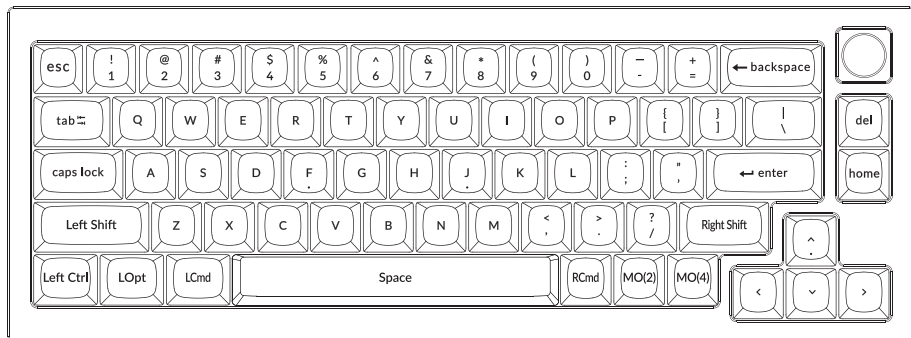


レイヤー1:キーボードのシステムトグルがWindowsの場合に有効になります。

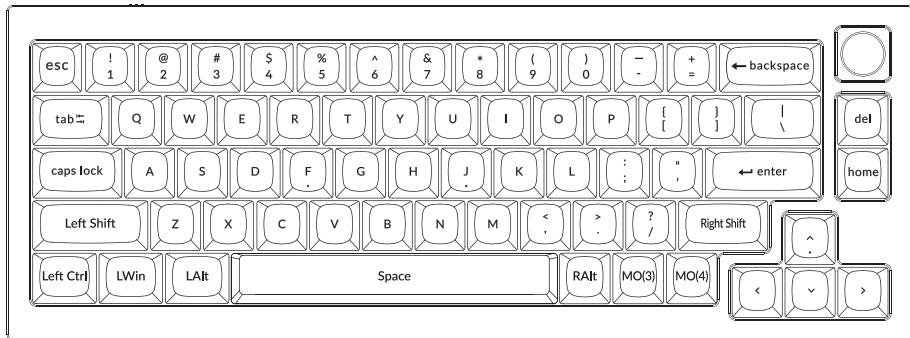


LWin = Left Windows LAlt = Left Alt RAlt = Right Alt


レイヤー2:キーボードのシステムトグルがMacで、fn1/MO(2)キーを押した場合に有効になります。

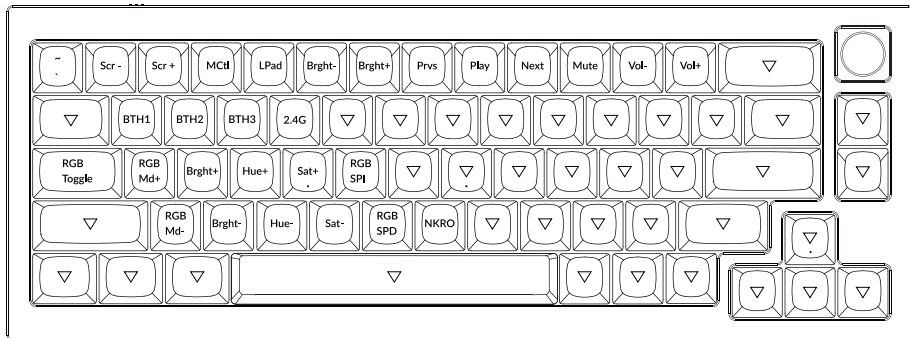

レイヤー3:キーボードのシステムトグルがWindowsで、fn1/MO(3)キーを押した場合に有効になります。

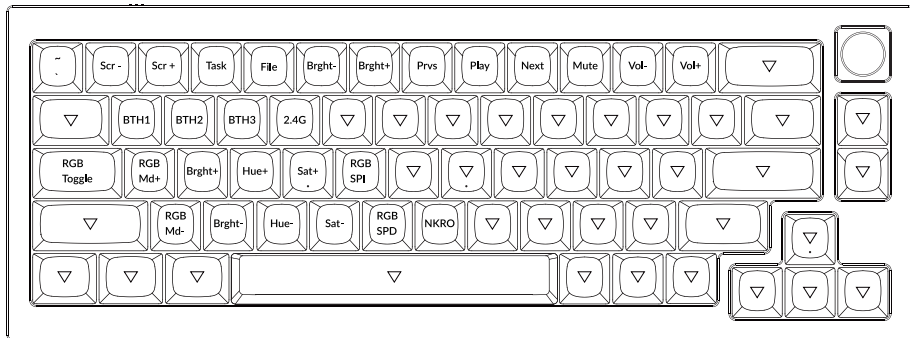

レイヤー4:FN2/MO(4)キーを押した場合に有効になります。

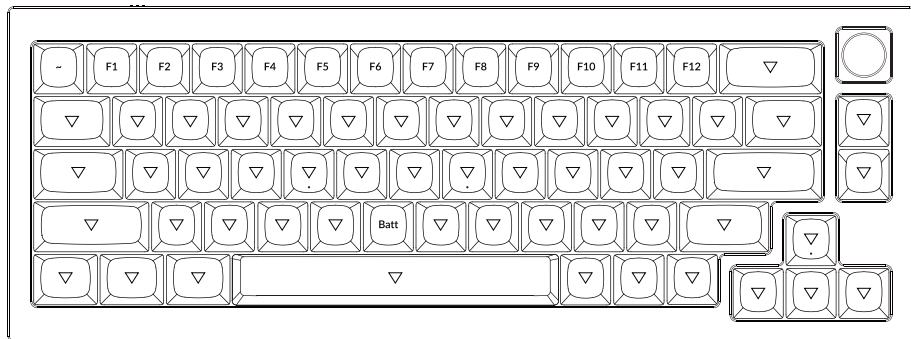

キー説明

キー説明		キー説明		キー説明	
Scr-	画面の輝度低下	RGBMd-	RGBモード戻る	Sat+	彩度上昇
Scr+	画面の輝度上昇	Hue+	色相上昇	Sat-	彩度低下
Bright-	バックライト低下	Hue-	色相低下	2.4G	2.4GHzホスト
Bright+	バックライト上昇	RGB SPI	RGB速度上昇	Batt	バッテリー残量
Prvs	戻る	RGB SPD	RGB速度低下	NKRO	Nキーロールオーバー
Play	再生/停止	MO(1)	このキーを押した場合、レイヤー1が有効になります。		
Next	進む	MO(2)	このキーを押した場合、レイヤー2が有効になります。		
Mute	ミュート	MO(3)	このキーを押した場合、レイヤー3が有効になります。		
Vol-	音量低下	MO(4)	このキーを押した場合、レイヤー4が有効になります。		
Vol+	音量上昇	BTH1	Bluetoothホスト1		
RGB Toggle	バックライトON/OFF	BTH2	Bluetoothホスト2		
RGBMd+	RGBモード進む	BTH3	Bluetoothホスト3		

LEDステータス概要

LED	機能	ステータス
パワー インジケータ	充電	充電中 - 赤く点灯 フル充電 - 緑に点灯 僅少 - ゆっくりと点滅
Bluetooth / 2.4GHz 帯インジケータ	Bluetooth / 2.4GHz帯	再接続 - 素早く点滅 ペアリング完了 - 消灯 ペアリング中 - ゆっくりと点滅
Caps Lock インジケータ	Caps Lock	Caps Lock有効 - ホワイトに点灯 CCaps Lock無効 - 消灯

機能説明： 充電

USBケーブルをポートに差し込み、もう一方をキーボードに差し込みます。パワーインジケータ：充電中は赤く点灯：約5時間で完全充電されると緑色に切り替わります。ローバッテリーの場合は、赤色に点滅します。

*Q2 Maxは全てのUSBポートと互換性があります。最高のパフォーマンスを得るには5V/1Aのアダプター、あるいはUSB3.0を使用してください。2.4GHz帯 / ケーブル(有線) / Bluetooth全てのモードで充電できます。

**この製品は最大5Vの充電電圧と1Aの充電電流に対応しております。不適切な充電によって引き起こされた問題については一切の責任を負いません。

2.4GHz / Bluetooth / ケーブルモード (モード切替スイッチ)

2.4GHz有線モード

1. 2.4GHzレシーバーを接続するデバイスのUSBポートに接続してください。
2. モード切替スイッチを2.4GHzに切り替えてください。本キーボードは自動的にご使用のデバイスと接続します。

有線モード

1. モード切替スイッチを「Cable」に切り替えてください (USBケーブルが接続されていない場合は無反応になります)。
2. ケーブルをデバイスとキーボードに接続してください。
3. バックライトが点灯します。

*有線モードの場合、節電モードにはなりません。

Bluetoothモード

1. モード切替スイッチをBluetoothに切り替えてください。
2. バックライトが点灯します。
3. "fn1 + Q" キーを同時に4秒間長押ししてBluetoothペアリングをアクティブにします (ペアリングを検出するためにBluetoothインジケータが3分間高速点滅します)。
4. お使いのデバイスでBluetoothデバイス「Keychron Q2 Max」を検索し、接続します (ペアリングが成功するとBluetoothインジケータが消えます)。

注意: このキーボードは組み合わせキー "fn1 + Q" / "fn1 + W" / "fn1 + E" で最大3台のデバイスのペアリング登録が出来ます。

*Bluetoothインジケータは3分間点滅します。

**Bluetoothのバージョンが異なるため、接続速度が遅い或いは失敗する可能性があります。すべての設定が正しく完了されたことを確認してください。

BLUETOOTHデバイスの切り替え

組み合わせキー「fn1 + 1 / fn1 + 2 / fn1 + 3」を短く押し、デバイスを切り替えます。

再接続：

1. キーボードをBluetoothの位置に切り替えてキーボードをアクティブにして下さい。(デフォルトではQ2 Maxは最後に接続したデバイスに接続します)
 2. Bluetoothインジケーターが4秒間点滅し、最後に接続したデバイスに接続します。
 3. Bluetoothインジケーターが消灯の場合、任意のボタンを押して、再度接続を行ってください。
- *この機能を実行するには、Q2 Maxが既にデバイスとペアリングされている必要があります。

キーボードの電源をOFFにする

モード切替スイッチを"Cable"にしてケーブルを取り外します。

バックライトの設定

- バックライトのオン/オフの切替は"fn1" + "tab"を短く同時に押します。
- バックライトの効果を変更する際は、"fn1" + "Q"もしくは"fn1" + "A"を短く押します。

OS切り替え

1 – MAC/iOS

Mac/iOSに接続している時は、スイッチをMac/iOSに切り替えます。

2 – WINDOWS/ANDROID

WindowsまたはAndroidに接続されている時は、スイッチをWindows/Androidに切り替えます。

*WindowsまたはAndroidモードの際は、「Windows」と「Alt」のファンクションキーとして使用されます。

トラブルシューティング

キーボードとデバイスがペアリングできない場合は、ペアリングしようとしているデバイスがBluetooth対応であることを確認してください。

対応の場合はデバイスを再起動し、もう一度キーボードとペアリングしてみてください。

注意: Windowsコンピュータでは、新しいBluetooth接続により、追加のソフトウェアを更新する場合があります。このプロセスは正常に完了したことを示すメッセージが表示された後も継続中の可能性があります。ペアリング後、少なくとも20分待って、すべてのアップデートが完了したことを確認してからコンピュータを再起動してください。

デバイスがBluetooth接続 (Windows) に対応し、外部キーボード (HIDプロファイル) をサポートしていることを確認してください。

Bluetoothデバイス>設定を開き、以下を選択します。

Bluetoothデバイスがコンピュータを検出できるようにする。

Bluetoothデバイスがこのコンピュータに接続できるようにします。

Bluetoothデバイスが接続を要求したときに通知する。

キーボードがBluetoothモードで動作しない。

お使いのコンピュータ / スマートフォン:

Bluetooth設定 > キーボードを選択して「接続解除」もしくは「このデバイスの登録を解除」を行ってください。

デバイスを再起動し、最初からBluetooth接続を行ってください。

お使いのキーボード:

キーボードの電源をOFFにしてから再びONにして、デバイスと再度接続してください。

キーボードが2.4GHzモードで動作しない場合

まずは、システム切替スイッチが2.4GHzに設定されていることを確認し、レシーバーをデバイスから取り外して"fn1 + R"を4秒間同時に長押しして強制ペアリングを実行します。

キーボードがレシーバーから20cm以内にあることを確認して、再度レシーバーをデバイスに挿入してください。

ご使用環境によりワイヤレス接続は10メートル以内でも切断される場合がございます。


キーボードがBluetooth信号を妨害する可能性のある金属付近に置かれているかどうかを確認してください。

サードパーティーの入力ツールと互換性がありません

Windows / Android OSの互換性、バージョン、ブランドにより、キーボードの使用中にサードパーティーの入力ツール機能が影響を受ける場合があります。システムとドライバが最新であることを確認してください。

特定のマルチメディアキーまたはファンクションキーが機能しない

ご使用のデバイスの互換性、バージョン、ブランド、ドライバにより機能しない場合があります。

*Multimedia keys: 

Function keys: 

安全上の注意:

事故を防ぐために、製品、付属品、および梱包部品を子供の手の届かない場所に保管してください。
腐食を避けるために、製品を乾燥した環境に保管してください。

キーボードとバッテリーの寿命を維持する為には、製品を-10度以下または50度以上の温度環境で使用、保管をしないでください。

Keychron, Inc.

Dover, DE 19901, United States

Find us at:

<https://www.keychron.com>

Support@keychron.com

 @keychron

 @keychron

 @keychronMK

Designed by Keychron

Made in China



Q2 Max Wireless Mechanical Keyboard

Knob
Version

Fully Assembled Version

Keyboard

1x Fully Assembled Keyboard

Including

1x Aluminum Case

1x PCB

1x PC Plate

1x Sound Absorbing Foam

1x IXPE Foam

1x PET Film

1x Latex Bottom Pad

1x Bottom Case Acoustic Foam


1x Bottom Case PET Film

14x Gaskets (10 Installed and 4 in the Box)

4 sets x Stabilizers

1 set x Keycaps (PBT Double-shot)

1 set x Switches

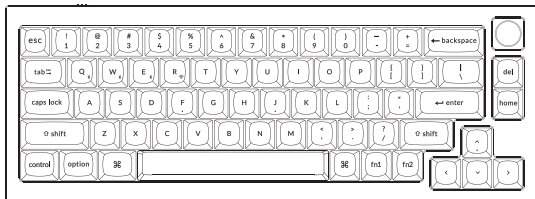

Cable

1x Type-C Cable

1x Type-A to Type-C Adapter

1x Extension Adapter for Receiver

Receiver


1x Type-A 2.4 GHz Receiver

Tools

1x Keycap & Switch Puller

1x Screwdriver

1x Hex Key

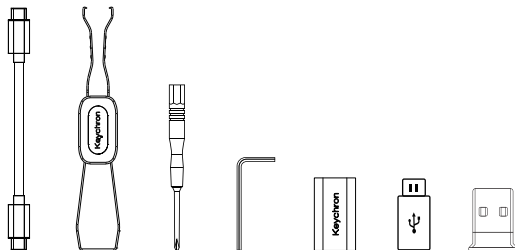

Barebone Version

Keyboard Kit

1x Keyboard Kit (Without Keycaps & Switches)

Including

1x Aluminum Case

1x PCB

1x PC Plate

1x Sound Absorbing Foam

1x IXPE Foam

1x PET Film


1x Latex Bottom Pad

1x Bottom Case Acoustic Foam

1x Bottom Case PET Film

14x Gaskets (10 Installed and 4 in the Box)

4 sets x Stabilizers

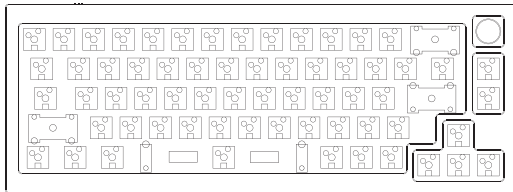

Cable

1x Type-C Cable

1x Type-A to Type-C Adapter

1x Extension Adapter for Receiver

Receiver


1x Type-A 2.4 GHz Receiver

Tools

1x Keycap & Switch Puller

1x Screwdriver


1x Hex Key

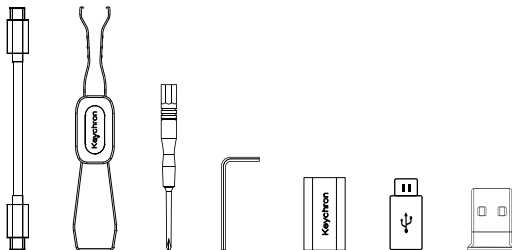

Quick Start Guide


If you are a Windows user, please find the appropriate keycaps in the box, then follow the instructions below to find and replace the following keycaps.

Mac / Windows

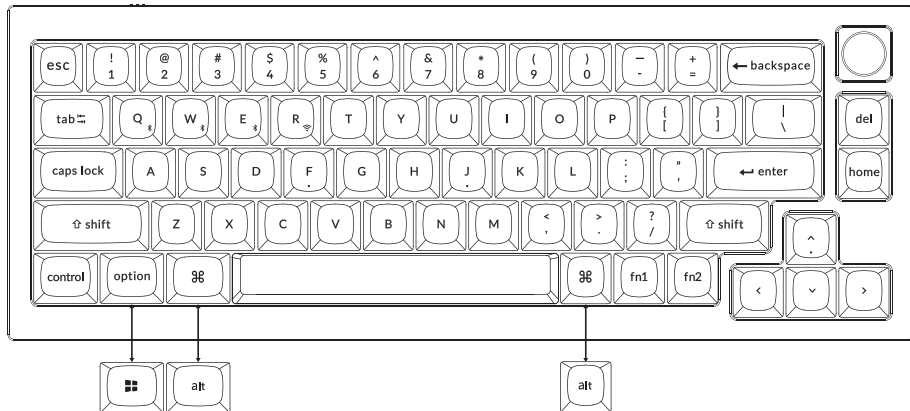


1 Switch To The Right System

Please make sure the system toggle on the top left corner has been switched to the same system as your computer's operating system.




2 Connect 2.4 GHz Receiver



Connect the 2.4 GHz receiver to the device USB port.



Switch toggle to 2.4 GHz mode




G = 2.4 GHz




Note: For the best wireless experience, we recommend using the extension adapter for receiver and putting the 2.4 GHz receiver somewhere on your desk close to your keyboard for a low rate of latency and fewer signal interferences.


3 Connect Bluetooth




Switch toggle to Bluetooth




Press fn1 + Q (for 4 seconds) and pair with device named Keychron Q2 Max



4 Connect Cable




Switch toggle to Cable



5 Multimedia Key and Function Key

Multimedia keys



Function keys


F1 / F2 / F3 / F4 / F5 / F6 / F7 / F8 / F9 / F10 / F11 / F12

In order to get Multimedia Key, you need to press fn1 and  Key.

In order to get Function Key, you need to press fn2 and  Key.


6 The Backlight

Press fn1 + A to change the lighting effect



fn1 + A


Press fn1 + caps lock to turn the backlight on/off



fn1 + caps lock


7 Adjust The Backlight Brightness

Press fn1 + S to increase the backlight brightness



fn1 + S


Press fn1 + X to decrease the backlight brightness



fn1 + X


8 Adjust The Backlight Speed

Press fn1 + G to increase the light effect speed



fn1 + G

Press fn1 + B to decrease the light effect speed



fn1 + B


9 Warranty

The keyboard is highly customizable and easy to be rebuilt. If anything goes wrong with any of the keyboard components of keyboard during the warranty period, we will only replace the defective parts of the keyboard, not the whole keyboard.



10 The Layers

There are five layers of key settings on the keyboard. The layer 0 is for the Mac system. The layer 1 is for the Windows system. The layer 2 is for the Mac Multimedia keys. The layer 3 is for the Windows Multimedia keys. The layer 4 is for function keys.



If your system toggle is switched to Mac, then the layer 0 will be activated.



If your system toggle is switched to Windows, then the layer 1 will be activated.



11 The Keychron Launcher App

Please visit launcher.keychron.com to access the Keychron online launcher app. This app enables users to remap keys, adjust key actuation points, assign multiple commands to a single key, enter game controller mode, and more.


If it cannot recognize your keyboard, please reach our support to get instruction.



*The online launcher App can only run on the latest version of Chrome, Edge, and Opera browsers yet.

*The online launcher App only works when the keyboard is connected by wire to the computer.

12 Factory Reset



Troubleshooting? Don't know what's going on with the keyboard?

Factory reset your keyboard

1. Power on your keyboard.
2. Press and hold fn2 + J + Z (for 4 seconds). The keyboard backlight will flash in red quickly for 3 seconds, indicating that the keyboard has been reset.

Flash your keyboard firmware

1. Visit launcher.keychron.com to open the online Launcher web app.
2. Ensure the keyboard is in Cable or Wired mode and plug in the power cable.
3. Find the 'Firmware Update' tab on the left side of the Launcher and connect your keyboard with it.
4. Follow the instructions on the Launcher and complete the firmware update.

*Step-by-step guide, search the keyword "firmware" on keychron.com.

Q2 MAX WIRELESS MECHANICAL KEYBOARD SPECIFICATIONS

Number of keys: 67

Switch type: Mechanical

Battery: 4000mAh

Wireless working time (RGB): Up to 100 hours (Lowest brightness)

Charging time: Around 5 hours

Charging port: Type-C

Mode: 2.4 GHz/ Cable / Bluetooth


Wireless operating distance: Within 10 meters (open space)

Name of Bluetooth device: Keychron Q2 Max



Operating environment: -10 to 50°C

Technical specifications can be subjected to change without notice, we apologize for any inconvenience caused.

Q2 MAX WIRELESS MECHANICAL KEYBOARD OVERVIEW

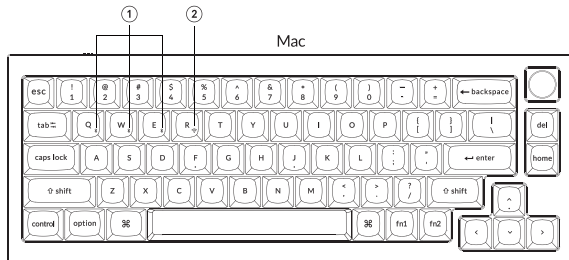


Windows

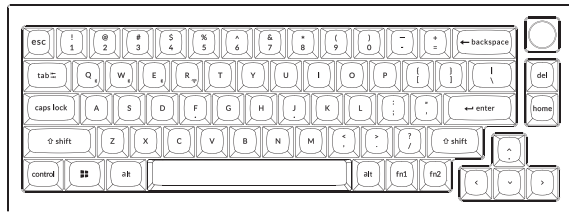


- ① Bluetooth Indicator
- ② 2.4 GHz Indicator
- ③ G Cable BT (Mode Toggle)
- ④ Win/Android Mac/iOS (OS Toggle)
- ⑤ Type-C Port
- ⑥ Power Indicator

DEFAULT KEY LAYOUT:

LAYER 0: This layer will be activated when your keyboard's system toggle is switched to Mac.

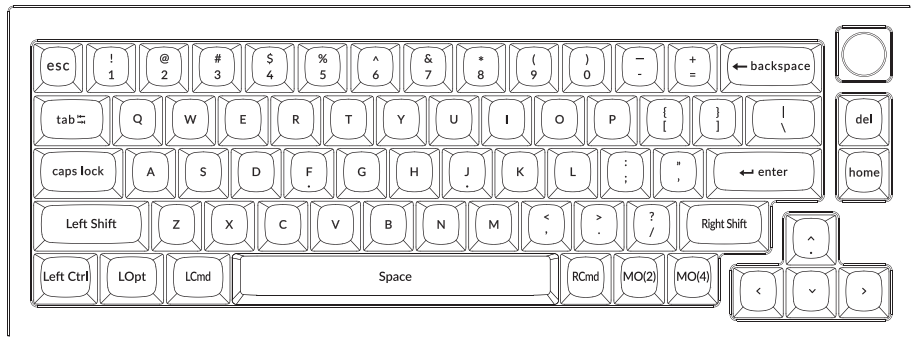


LAYER 1: This layer will be activated when your keyboard's system toggle is switched to Windows.

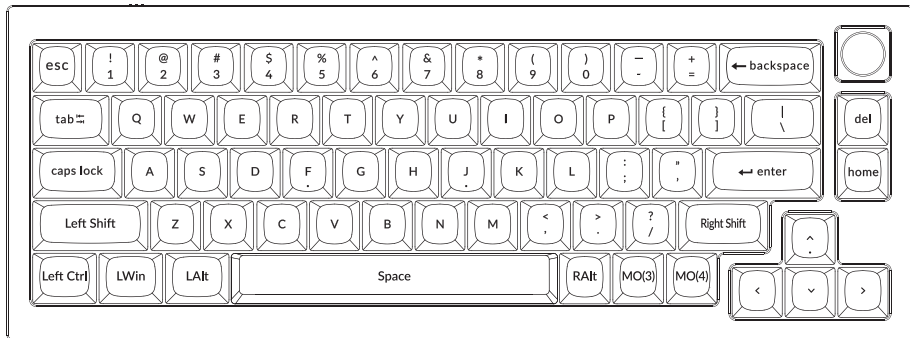


LWin = Left Windows LAlt = Left Alt RAlt = Right Alt


LAYER 2: This layer will be activated when your keyboard's system toggle is switched to Mac and press the fn1/MO(2) key.

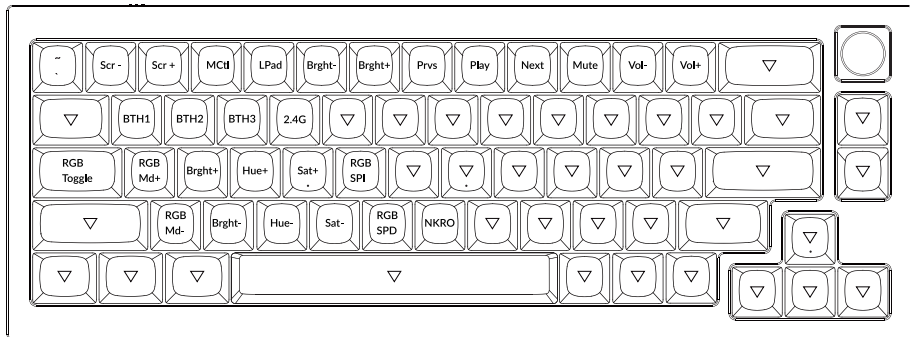

LAYER 3: This layer will be activated when your keyboard's system toggle is switched to Windows and press the fn1/MO(3) key.

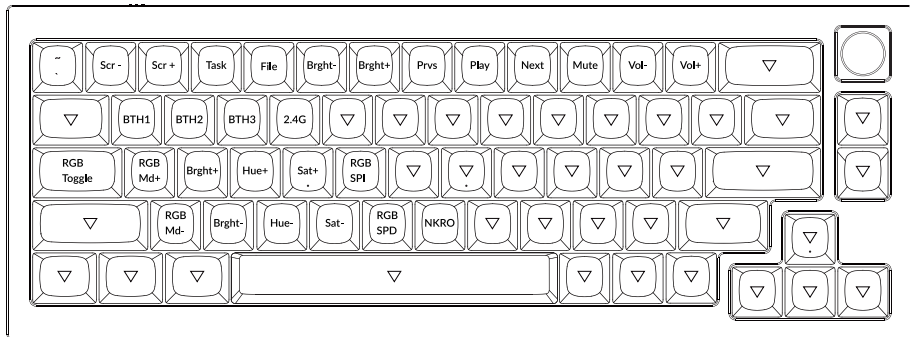

LAYER 4: This layer will be activated when you press the fn2/MO(4) key.

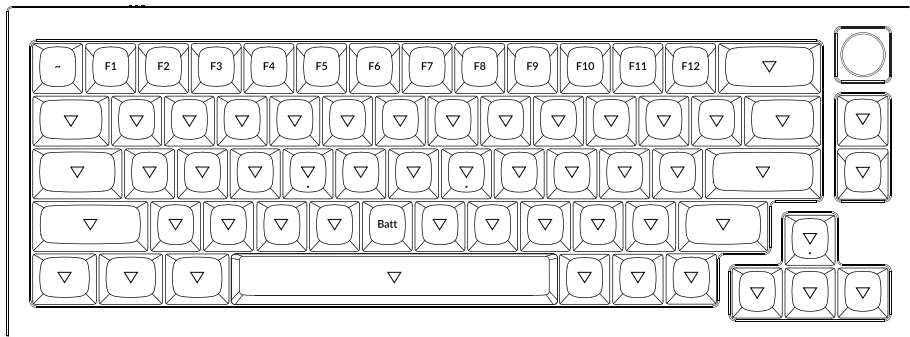

KEY DESCRIPTION

Key Description		Key Description		Key Description	
Scr-	Screen Brightness Decrease	RGBMd-	RGB Mode Previous	Sat+	Saturation Increase
Scr+	Screen Brightness Increase	Hue+	Hue Increase	Sat-	Saturation Decrease
Bright-	Backlight Decrease	Hue-	Hue Decrease	2.4G	2.4 GHz Host
Bright+	Backlight Increase	RGB SPI	RGB Speed Increase	Batt	Battery life
Prvs	Previous	RGB SPD	RGB Speed Decrease	NKRO	N-key rollover
Play	Play/Pause	MO(1)	Layer 1 will be activated when holding this key		
Next	Next	MO(2)	Layer 2 will be activated when holding this key		
Mute	Mute	MO(3)	Layer 3 will be activated when holding this key		
Vol-	Volume Decrease	MO(4)	Layer 4 will be activated when holding this key		
Vol+	Volume Increase	BTH1	Bluetooth Host 1		
RGB Toggle	Turn Backlight on/off	BTH2	Bluetooth Host 2		
RGBMd+	RGB Mode Next	BTH3	Bluetooth Host 3		

LED STATUS OVERVIEW

LED Location	Function	Status
Power Indicator	Charging	Charging - Static Red Fully charged - Static Green Low power - Slow Blinking
Bluetooth / 2.4 GHz Indicator	Bluetooth / 2.4 GHz	Reconnecting - Fast Blinking Paired - Light off Pairing - Slow Blinking
Caps Lock Indicator	Caps Lock	Enable Caps Lock - Static White Disable Caps Lock - Light Off

FUNCTION DESCRIPTION: CHARGING

Plug the cable into a USB port and plug the other end into the keyboard port. **Power Indicator:** A red light will stay on while charging; Fully charged in around 5 hours, a green battery indicator will appear. If the power is low, the red light will blink.

*The Keychron keyboard is compatible with all USB ports. Please use a 5V 1A adapter or USB 3.0 for the best performance. The Keychron Q2 Max can be charged in 2.4 GHz/Cable/Bluetooth mode.

**This product supports up to 5V charging voltage and 1A charging current. We are not responsible for any problems caused by improper charging.

2.4 GHZ / BLUETOOTH / WIRED MODE (MODE TOGGLE)

2.4 GHZ WIRED MODE

1. Connect the 2.4 GHz receiver to your device's USB Port.
2. Switch the toggle to the 2.4 GHz option. The keyboard will automatically connect to your device.

WIRED MODE

1. Switch the toggle to the Cable option (it only works when a USB cable is plugged in).
2. Connect our cable with your PC and keyboard.
3. Backlighting will be turned on.

*Under Wired Mode, keyboard will not enter into Battery Saver Mode.

BLUETOOTH MODE

1. Switch the toggle to the Bluetooth option.
2. Backlighting will be turned on.
3. Hold "fn1+Q" key for 4 seconds to activate Bluetooth pairing (the Bluetooth indicator fast flashes for 3 minutes to detect pairing).
4. Search for the Bluetooth device "Keychron Q2 Max" on your device and connect it (the Bluetooth indicator goes off after successful pairing).

Note: This keyboard supports pairing up to 3 devices simultaneously via key combination "fn1" + "Q" / "fn1" + "W" / "fn1" + "E".

**The Bluetooth indicator will continue to flash for 3 minutes.*

***Slow or failed connections may exist due to different Bluetooth versions, please make sure all the settings are correct.*

SWITCH BLUETOOTH DEVICES

Short press key combination “fn1” + “Q” / “fn1” + “W” / “fn1” + “E” to switch to other device.

RECONNECT:

1. Switch the keyboard to the Bluetooth option to activate the keyboard.
2. The Bluetooth indicator flashes for 4 seconds and automatically pairs with the last paired device.
3. If the Bluetooth indicator is off, press any button to enter the connection again.

*The keyboard must have been paired with the device to perform this function.

TURN OFF THE KEYBOARD

Switch the keyboard to the Cable option and unplug the power cable.

BACKLIGHT SETTING

- Short press key combination “fn1” + “caps lock” or “fn1” + “knob (press)” to turn the backlight on/off.
- Short press key combination “fn1” + “A” / “fn1” + “Z” to switch between different types of lighting effects.

OS TOGGLE

1 – MAC/iOS

Switch the toggle to Mac/iOS when the keyboard is connected to a Mac or iOS operating system.

2 – WINDOWS/ANDROID

Switch the toggle to Windows/Android when the keyboard is connected to a Windows or Android operating system.

*When using the Windows/Android mode,   keys are used for “Windows” and “Alt” functions.

TROUBLESHOOTING

If unable to pair keyboard to device, confirm that the device you're trying to pair with is Bluetooth-capable. If so, restart the device and try pairing it with the keyboard again.

Note: On a Windows computer, a new Bluetooth connection will sometimes require additional software updates—a process that may still be ongoing after a message appears indicating a successful completion. Wait at least 20 minutes after pairing to make sure all updates are completed before restarting the computer.

Confirm that the device is configured to accept Bluetooth connections (Windows) and supports an external keyboard (HID profile).

Go to Bluetooth Devices > Open Settings and select the following:

Allow Bluetooth devices to find this computer

Allow Bluetooth devices to connect to this computer

Alert me when a Bluetooth device wants to connect

My keyboard isn't working in Bluetooth mode.

For the computer/smartphone:

Go to your device Bluetooth settings>Select the keyboard and remove/delete/unpair it.

Then restart your device.

For the keyboard:

Turn the keyboard off and back on. Then reconnect it to your device.

My keyboard isn't working in 2.4 GHz mode.

Ensure the toggle is set to 2.4 GHz, remove the receiver from your device, and press "fn1" + "R" for 4 seconds to force pair, then reinsert the receiver into the device, keeping the keyboard within 20 cm of the receiver for optimal pairing.

Wireless connection is interrupted even within 10 meters.


Check if the keyboard is resting on a metal surface that can interfere with the wireless signal.

Third-party input tools are not compatible with the keyboard.

Due to compatibility, versions, brands and drivers of Windows/Android OS, functions of third-party input tools may be affected while using the keyboard. Please make sure your operating system and drivers are up to date.

Certain multimedia keys or function keys do not work.

Functions of certain multimedia keys may be disabled due to compatibility, versions, brands, and drivers of devices.

*Multimedia keys: 

Function keys: 

Safety Precaution:

Keep the product, accessories and packaging parts out of the reach of children to prevent any accidents and choking hazards.

Always keep the product dry to avoid corrosion.

Do not expose the product to extreme temperatures below -10°C(14°F) or above 50°C(122°F) to preserve the lifespan of the keyboard.

Keychron, Inc.

Dover, DE 19901, United States

Find us at:

<https://www.keychron.com>

Support@keychron.com

 @keychron

 @keychron

 @keychronMK

Designed by Keychron

Made in China