



**K8 Bluetooth メカニカルキーボード**

## 内容物：

Keychron K8 Bluetoothメカニカルキーボード x 1

Type-Cケーブル x 1

ユーザーマニュアル x 1


クイックスタートガイド x 1

交換用キーキャップセット(Windows) x 1

## クイックスタートガイド

Windows をお使いの方は、付属のWindows 用キーキャップと交換してお使いください。


Mac / Windows

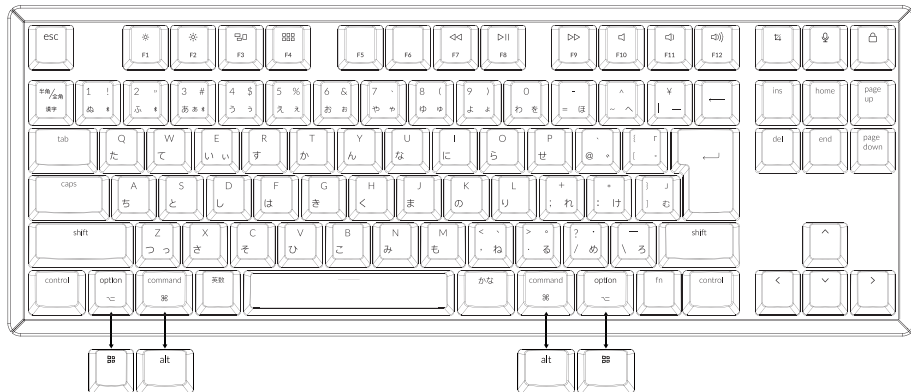

## 1 Bluetooth接続



ボタンをBluetoothに切り替えてください。




fnキー + 1を4秒間押し続けてKeychron K8を  
デバイスとペアリングして下さい。




---

## 2 ケーブル接続




スイッチをケーブルに切り替えて下さい。




### 3 ファンクションキーとマルチメディアキーの切替 (F1- F12)

Windowsの場合はfn + X + Lを4秒間押しして切り替えます。



Macの場合、「システム設定」→「キーボード」を選択し、ファンクションキーを有効にして下さい。

F5&F6を使用するにはfn + K + Cを4秒間押しして、同じショートカットを使用して切り替えます。



### 4 自動スリープモードを無効にする

キーボードは、バッテリーを節約するために待機状態で10分を過ぎると自動スリープモードになります。



fn + S + Oを4秒間押しすと自動スリープモードを無効に出来ます。



## 5 キーのリマップ

現状では公式のリマップ用アプリのご用意はありませんが、下記のアプリを利用することでリマップが可能です。  
(ライトに関する機能を除きます)

For Mac - Karabiner

Karabiner

For Windows - SharpKeys

SharpKeys

## 5.5

facebook上でLinuxのユーザーグループがあります。  
"Keychron Linux Group"で検索してみてください。  
キーボードをより良くお使いいただくヒントがあります。



---

## 6 Siri / Cortanaの有効化

Siri (Mac): システム設定→Siri→ショートカット  
※SiriはMacOSのみで動作し、iOSには対応していません。



システム設定



Siri



ショートカット設定

Cortana(Mac): スタート→設定→Cortanaで  
Windowsキー + Cキーを設定。

※CortanaはWindows10以上で動作し、地域によってはお使いいただけません。



⊞ + C

## K8 BLUETOOTHメカニカルキーボード仕様

トータルキー数: 87キー(US)、91キー(日本語)

スイッチ: メカニカル / オプティカル

バッテリー: 4000mAh

充電時間: 約 3 時間

充電ポート: USB Type-C

モード: Bluetooth / 有線


Bluetooth 有効距離: 最大 10 メートル(オープンスペース)

Bluetooth デバイス名: Keychron K8

動作環境: -10 ~ 50°C

製品の仕様は予告なく変更になる場合があります。予めご了承ください。

## K8 BLUETOOTHメカニカルキーボード概要

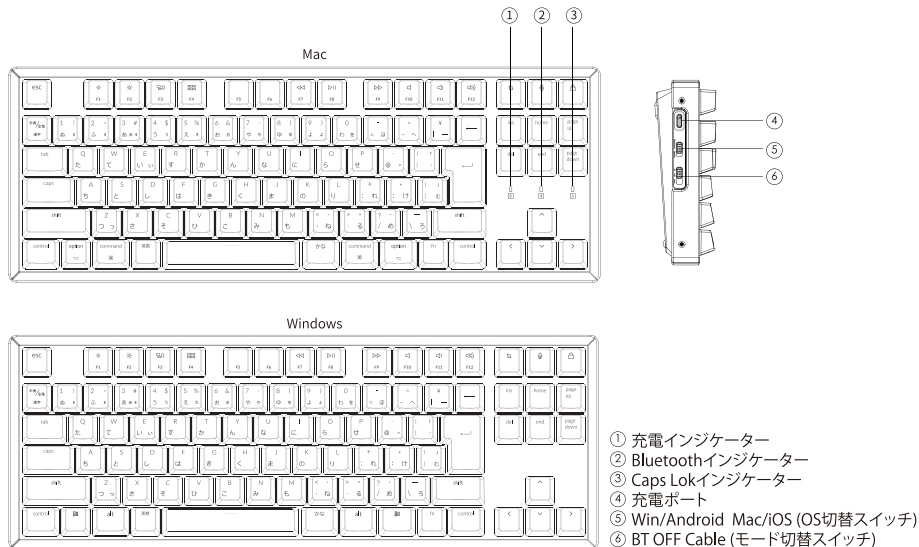



## LEDステータス概要

LED	機能	ステータス
バッテリー インジケータ	充電	バッテリー低 - 赤く点滅 充電中 - 赤く点灯 フル充電 - 緑に点灯
Bluetooth インジケータ	Bluetooth	ペアリング - 速く点滅 ペアリング済 - 消灯 切替 - ゆっくり点滅

### 機能説明:

#### 充電

USBケーブルをポートに差し込み、もう一方をキーボードポートに差し込みます。

充電インジケータ: バッテリーが15%未満になると、充電インジケータが赤く点滅します。

充電時、充電インジケータが赤く点灯します。約3時間で完全充電されると、充電インジケータが緑色に表示されます。

K8はすべてのUSBポートと互換性があります。最高のパフォーマンスを得るには5V2Aのアダプター、あるいはUSB3.0を使用してください。Bluetoothのモードが ON / OFFでも充電できます。

この製品は最大5Vの充電電圧と2Aの充電電流に対応しております。

不適切な充電によって引き起こされた問題について一切の責任を負いません。

## **BLUETOOTH/有線モード(切り替えボタン)**

### **有線モード**

- 1.切り替えボタンをCableに切り替えてください。  
(USBケーブルが接続されていない場合は無反応になります)
- 2.ケーブルをデバイスとキーボードに接続してください。

\*有線モードの場合、節電モードにはなりません。

### **BLUETOOTHモード**

- 1.切り替えボタンをBluetoothに切り替えてください。
- 2.バックライトが点灯します。
- 3.Fn + 1キーを4秒間押ししてBluetoothペアリングをアクティブにします。(ペアリングを検出するためにBluetoothインジケーターが3分間高速点滅します)

注意:このキーボードは組み合わせキー「Fn + 1 / Fn + 2 / Fn + 3」で最大3台のデバイスのペアリング登録ができます。

\*Bluetoothインジケーターは3分間点滅します。

\*\*Bluetoothのバージョンが異なるため、接続速度が遅い或いは失敗する可能性があります。すべての設定が正しく完了された事を確認してください。

## BLUETOOTHデバイスの切り替え

組み合わせキー「Fn + 1 / Fn + 2 / Fn + 3」を短く押し、デバイスを切り替えます。

### 再接続:

1. キーボードをBluetoothの位置に切り替えてキーボードをアクティブにして下さい。(デフォルトではK2は最後に接続したデバイスに接続します)
  2. Bluetoothインジケータが4秒間点滅し、最後に接続したデバイスに接続します。
  3. Bluetoothインジケータが消灯の場合、任意のボタンを押して、再度接続を行ってください。
- \*この機能を実行するには、K8が既にデバイスとペアリングされている必要があります。

## キーボードの電源をOFFにする

「OFF」に切替えてください。

## バッテリー節電モード

Bluetoothモードでは、K8のバックライトは10分間待機になるとオフになります。この自動節電モードを無効にする場合は、4秒間「Fn+S+O」ボタンを押してください。再度自動節電モードを起動したい場合はもう一度「Fn+S+O」を4秒間押してください。



## OS切り替え

### 1-MAC/iOS

Mac/iOSに接続されているときは、スイッチをMac / iOSに切り替えます。

### 2-WINDOWS/ANDROID

WindowsまたはAndroidに接続されているときは、スイッチをWindows / Androidに切り替えます。

WindowsまたはAndroidモードの際は、  キーは「Windows」と「Alt」のファンクションキーとして使用されます。

### 3-入力方法の切り替え

iOSの場合：

入力方法の切替：Ctrl + Space

caps lock：caps(一般>キーボード>ハードウェア キーボード>caps Lock言語切替)

Androidの場合：

入力方法の切替：Shift + Space

注意：Windows / Android OSの互換性、バージョン、ブランド、ドライバにより、特定のマルチメディアキーの機能が無効になる場合があります。OSを頻繁に切り替えないことをお勧めします。

### トラブルシューティング

キーボードとデバイスがペアリングできない場合は、ペアリングしようとしているデバイスがBluetooth対応であることを確認してください。

対応の場合はデバイスを再起動し、もう一度キーボードとペアリングしてみてください。

注意：Windowsコンピューターでは、新しいBluetooth接続により、追加のソフトウェアを更新する場合があります。このプロセスは正常に完了したことを示すメッセージが表示された後も継続中な可能性があります。ペアリング後、少なくとも20分待って、すべてのアップデートが完了したことを確認してからコンピューターを再起動してください。

デバイスがBluetooth接続 (Windows) に対応し、外部キーボード (HIDプロファイル) をサポートしていることを確認してください。

Bluetoothデバイス>設定を開き、以下を選択します。

Bluetoothデバイスがコンピューターを検出できるようにする。

Bluetoothデバイスがこのコンピューターに接続できるようにします。

Bluetoothデバイスが接続を要求したときに通知する。

## **キーボードが動作しない**

解決方法:

キーボードを再起動してください。

Bluetoothをオフにしてからコンピューターを再起動してください。(Windows)

お使いのデバイス:

Bluetooth設定>Bluetoothをオフ>キーボードを削除してください。

デバイスを再起動し、最初からBluetooth接続を行ってください。

## **Bluetooth接続が10メートル以内でも中断されます**

キーボードがBluetooth信号を妨害する可能性のある金属付近に置かれているかどうかを確認してください。

## **サードパーティの入力ツールとの互換性がありません**

Windows / Android OSの互換性、バージョン、バインド、ドライバにより、キーボードの使用中にサードパーティの入力ツール機能が影響を受ける場合があります。システムとドライブが最新であることを確認してください。

## **特定のFnキーまたはマルチメディアキーがWindows / Androidモードで機能しない**

Windows / Android OSの互換性、バージョン、バインド、ドライバにより、機能しない場合があります。

**安全上の注意:**

事故を防ぐために、製品、付属品、および梱包部品を子供の手の届かない場所に保管してください。

腐食を避けるために、製品を乾燥した環境に保管してください。

キーボードとバッテリーの寿命を維持する為には、製品を-10度以下または50度以上の温度環境で使用、保管をしないでください。

**Keychron, Inc.**

**Dover, DE 19901, United States**

Find us at:

<https://www.keychron.com>

[Support@keychron.com](mailto:Support@keychron.com)

 @keychron

 @keychron

 @keychronMK

Designed by Keychron

Made in China



**K8 Non Backlit Bluetooth Mechanical Keyboard**



## **IN THE BOX:**

Keychron K8 Bluetooth Mechanical Keyboard x 1

Type-C Cable \* 1

Manual \* 1


Quick Start Guide \* 1

Extra Keycaps Set \* 1



## Quick Start Guide

If you are a Windows user, please find the appropriate keycaps in the box, then follow the instructions below to find and replace the following keycaps.

Mac / Windows

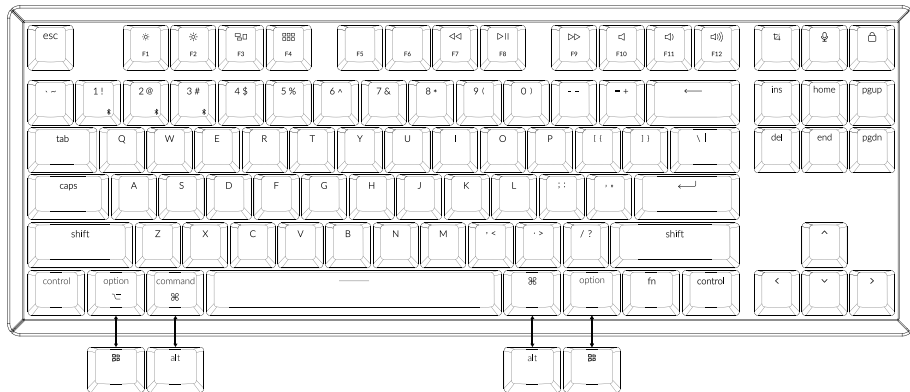

## 1 Connect Bluetooth




Press fn + 1 (for 4 seconds) and pair with device named Keychron K8



---

## 2 Connect Cable



### 3 Switch Between Function and Multimedia Keys (F1- F12)

For Windows: Press **fn + X + L** (for 4 seconds) to switch



**fn + X + L**

☼ / ☼ / 🗨 / 🗨 / ⏪ / ⏩ / ⏪ / ⏩ / ⏪ / ⏩

Multimedia keys

F1 F2 F3 F4 F5 F6 F7 F8 F9 F10 F11 F12

Function keys



Settings



Keyboard



Use F1,F2,etc.keys as standard function keys  
When this option is selected,press the Fn key to use the special features printed on each key.

Enable the function keys

### 4 Disable Auto Sleep Mode

The keyboard goes to Auto Sleep Mode in 10 minutes of sitting idle to save battery



Press **fn + S + O** (for 4 seconds) to disable the Auto Sleep Mode.



**fn + S + O**

## 5 Remap keys

We don't have an official software to remap the keys yet. But you can use these two software to get the job done. (Except the light effect key)

For Mac – Karabiner

Karabiner

For Windows – SharpKeys

SharpKeys

## 5.5 Linux's Setting

We have a Linux user group on facebook. Please search "Keychron Linux Group" on facebook. So you can better experience with our keyboard.



---

## 6 Activate Siri / Cortana

For Siri on Mac: Go to System preferences> Siri > select "Press Fn (Function) Space" option.

\*Siri key only works on macOS and does not work on iOS.



Settings



Siri



✓ Press Fn (Function) Space

For Cortana on Windows: Select Start > Settings > Cortana and select the shortcut by pressing Windows key + C key.

\*Windows Cortana is only available for Windows 10 and above OS. Cortana is only available in certain countries / regions and might not work everywhere.



⊞ + C

## K8 BLUETOOTH MECHANICAL KEYBOARD SPECIFICATIONS

Number of keys: 87

Switch type: Mechanical / Optical Switch

Battery: 4000mAh

Charging time: Around 3 hours

Charging port: USB Type-C

Mode: Bluetooth/Wired


Bluetooth operating distance: Within 10 meters (open space)

Name of Bluetooth device: Keychron K8

Operating Environment: -10 to 50°C

Technical specifications can be subjected to change without notice we apologize for any inconvenience caused

## K8 BLUETOOTH MECHANICAL KEYBOARD OVERVIEW

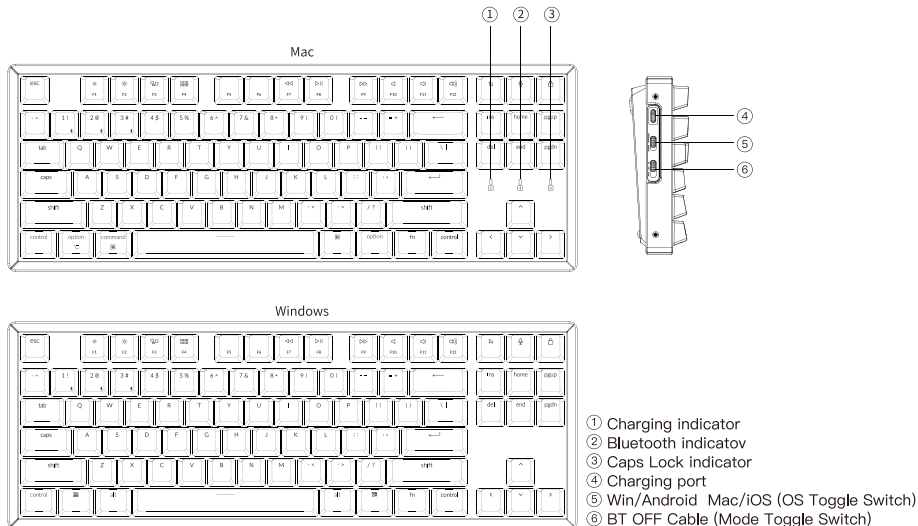

## LED STATUS OVERVIEW

LED Location	Function	Status
Battery indicator	Charging	Low battery - Blinking Red Charging - Static Red Fully charged - Static Green
Bluetooth indicator	Bluetooth	Pairing - Slow Blinking Paired - Light Off Switching - Fast Blinking

## FUNCTION DESCRIPTION:

### CHARGING

Plug the cable into a USB port and plug the other end into the keyboard port. Charging Indicator: When battery is below 15%, a red battery blinking indicator will be triggered. A red light will stay on while charging; Fully charged in around 3 hours, a green battery indicator will appear.

\*The Keychron keyboard is compatible with all USB ports. Please use a 5V 2A adapter or USB 3.0 for the best performance. The Keychron K8 can be charged in Bluetooth/on/off mode.

\*\* This product supports up to 5V charging voltage and 2A charging current. We are not responsible for any problems caused by improper charging.



## **BLUETOOTH/WIRED MODE (TOGGLE SWITCH)**

### **WIRED MODE**

1. Switch the toggle switch to Cable option (it only works when a USB cable is plugged in).
2. Connect our cable with your PC and keyboard.

\*Under Wired Mode, keyboard will not enter into Battery Saver Mode.

### **BLUETOOTH MODE**

1. Switch the keyboard to Bluetooth option.
2. Hold "Fn+1" key for 4 seconds to activate Bluetooth pairing (the Bluetooth indicator fast flashes for 3 minutes to detect pairing).
3. Search for the Bluetooth device "Keychron K8" on your device and connect it (the Bluetooth indicator goes off after successful pairing).

*Note: This keyboard supports pairing up to 3 devices simultaneously via combination key "fn" + "1" / "fn" + "2" / "fn" + "3".*

*\*The Bluetooth indicator will continue to flash for 3 minutes.*

*\*\*Slow or failed connections may exist due to different Bluetooth versions, please make sure all the settings are correct.*

## **SWITCH BLUETOOTH DEVICES**

Short press combination key “fn” + “1” / “fn” + “2” / “fn” + “3” to switch to other device.

## **RECONNECT:**

1. Switch the keyboard to the Bluetooth option to activate the keyboard (the keyboard will connect to the last connected device by default).
2. The Bluetooth indicator flashes for 4 seconds and automatically pairs with the last paired device.
3. If the Bluetooth indicator is off, press any button to enter the connection again.

\* The keyboard must have been paired with the device to perform this function.

## **TURN OFF THE KEYBOARD**

Switch to “Off”

## **BATTERY SAVER**

Under Bluetooth mode, the keyboard will enter battery save mode when it is inactive for 10 minutes. Tap any button to wake the keyboard. If want to disable this auto battery save mode, press fn+S+O for 4 seconds. Then if want to enter this power save mode again, press fn+S+O for 4 seconds.


## **OS SWITCH**

### **1- MAC/iOS**

Turn the switch to Mac/iOS when you are connected to a Mac or iOS operating system.

### **2–WINDOWS/ANDROID**

Switch the toggle to Windows/Android when the keyboard is connected to a Windows or Android operating system.

*\*When using the Windows/Android mode,   keys are used for “Windows” and “Alt” functions.*

### **3–INPUT METHOD SWITCH**

For iOS:

Input method switch: Ctrl + Space

Caps Lock: Caps (Enable General>Keyboards>Hardware Keyboard>Caps Lock Language Switch)

*For Android:*

Input method switch: Shift + Space

*NOTE: Functions of certain multimedia key may be disabled due to compatibility, versions, brands and drivers of Windows/Android OS. We also recommend not to switch OS frequently as it may impact keyboard operations.*

## **TROUBLESHOOTING**

If unable to pair keyboard to device, confirm that the device you're trying to pair with is Bluetooth-capable. If so, restart the device and try pairing it with the keyboard again.

Note: On a Windows computer, a new Bluetooth connection will sometimes require additional software updates—a process that may still be ongoing after a message appears indicating a successful completion. Wait at least 20 minutes after pairing to make sure all updates are completed before restarting the computer.

Confirm that the device is configured to accept Bluetooth connections (Windows) and supports an external keyboard (HID profile).

Go to Bluetooth Devices > Open Settings and select the following:  
Allow Bluetooth devices to find this computer  
Allow Bluetooth devices to connect to this computer  
Alert me when a Bluetooth device wants to connect

### **My keyboard isn't working.**

For the keyboard: Turn the keyboard off and back on.  
Turn Bluetooth off and restart the computer. (Windows)

For the device:

Go to Bluetooth settings and turn off Bluetooth and “forget” the keyboard.  
Restart the device and turn on Bluetooth to reconnect.

### **Bluetooth connection is interrupted even within 10 meter.**

Check if the keyboard is resting on a metal surface that can interfere with the Bluetooth signal.

### **Third party input tools are not compatible with the keyboard.**

Due to compatibility, versions, brands and drivers of Windows/Android OS, functions of third party input tools may be affected while using the keyboard. Please make sure your operating system and drivers are up to date.

### **Certain fn keys or multimedia keys does not work under Windows/Android mode.**

Functions of certain multimedia keys may be disabled due to compatibility, versions, brands and drivers of Windows/Android OS.

**Safety Precaution:**

Keep the product, accessories and packaging parts out of reach of children to prevent any accidents and choking hazards.

Always keep the product dry to avoid corrosion.

Do not expose the product to extreme temperatures below -10°C (5°F) or above 50°C (131°F) to preserve the lifespan of the keyboard and battery.

**Keychron, Inc.**

**Dover, DE 19901, United States**

Find us at:

<https://www.keychron.com>

[Support@keychron.com](mailto:Support@keychron.com)

 @keychron

 @keychron

 @keychronMK

Designed by Keychron

Made in China